



16 cm 2-Way Speaker 260 W MAX.



Key Selling Point

- Twaron** Aramid fiber cone reproduces deep and bold bass & bold vocal sound and also expresses even the most subtle nuances.
- Open & Smooth™ sound concept delivers open staging & smooth transition of driver response to provide the ultimate in-car sound.
- Included brackets** provide for installation flexibility and wide coverage.

Speaker Technology

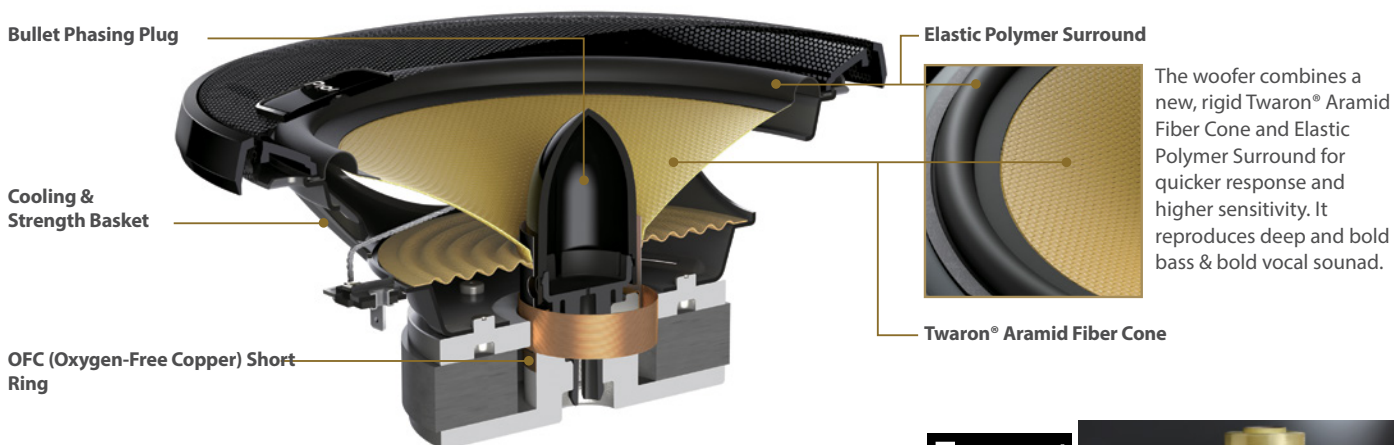



| | |
|--|---|
| | <p>Open*</p> <p>Open staging and sound characteristics enhance the widening effect that extends way beyond the space between speakers.</p> |
| | <p>Smooth*</p> <p>With smooth transitions between mid-bass and tweeter frequency characteristics, sound from these speakers is not marred by crossover frequency dips.</p> |

The new cone on the woofer of the Pioneer TS-D component offers a variety of improvements for optimal performance and phenomenal sound. The aramid fiber cone is constructed from Twaron® woven cloth that is hardened and shaped to produce a rigid and durable cone. The woofer offers stiffer dampening for quicker response. The woofer section of the TS-D component produces deep and bold bass & bold vocal sound.

* Twaron® is a registered trade mark of Teijin Aramid BV.

With the "Open & Smooth" sound of Pioneer D-Series Speakers out on the open road, the journey to more dramatic in-car audio sensations moves every passenger in its natural, dynamic flow.


A Superior Characteristic of D-Series: Smaller Dips for Wider Angles

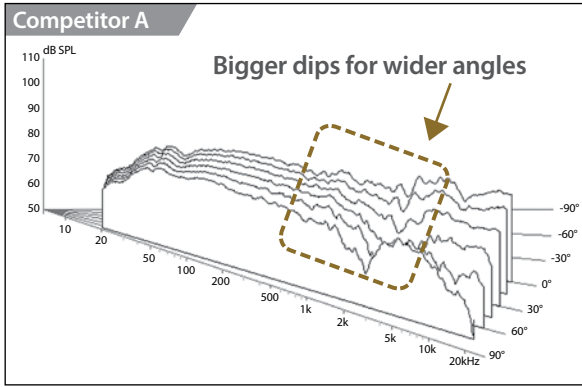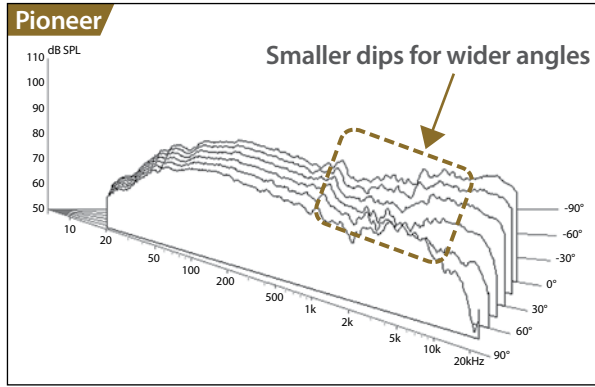


Unlike competitors' speakers, Pioneer D-Series speakers produce more natural sound without big gaps in the high-to-midrange frequency range for various angles.

Tweeter


Rear Chamber

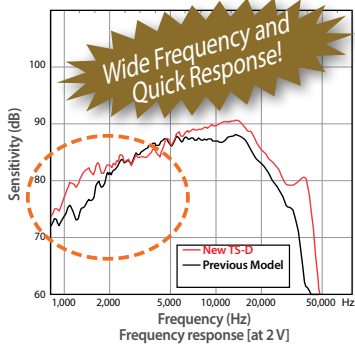

Light Weight Soft Dome Diaphragm

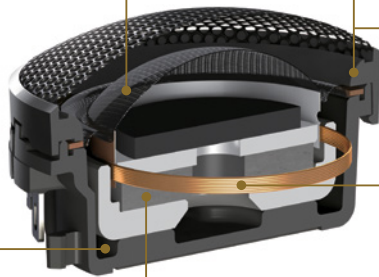


Optimized Flange Shape



CCA W (Copper-Clad Aluminum) Voice Coil

Neodymium Magnet

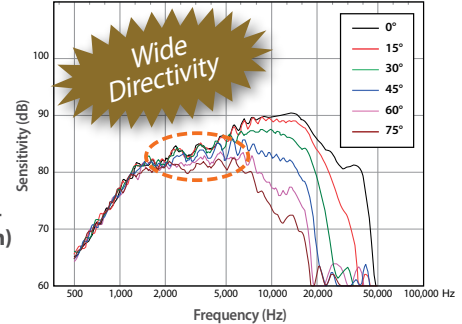


The flange is optimally shaped for wider directivity and reproduces steady sound.

The new D-Series components are capable of wider frequency sound and quicker response in playback than any models that preceded them.

Main Specifications

| Max input | Nominal Input | Frequency Response | Sensitivity | Impedance | Size | Tweeter size |
|-----------|---------------|--------------------|-------------|-----------|-------|--------------|
| 260 W | 60 W | 35 Hz to 32 KHz | 88dB | 4Ω | 16 cm | 28 mm |

Dimension

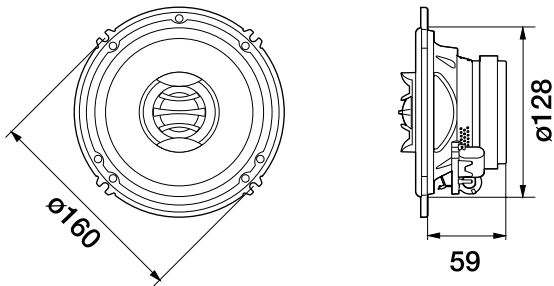

For more information please visit www.pioneer-mea.com

Year of Release: 2016

Pioneer, Gulf Free Zone Dubai, U.A.E.
Tel: +971 4 8815756, Fax 8816414
Email: support@pioneer-uae.com
www.pioneer-mea.com

Corporate web : www.pioneer.jp

Copyright Info: ©2016 Pioneer MEA. All Rights Reserved. Reproduction in whole or in part without written permission is prohibited. Design, Features and Specifications are subject to change without notice.

